U.S. DEPARTMENT OF HOMELAND SECURITY Federal Emergency Management Agency National Flood Insurance Program

OMB No. 1660-0008 Expiration Date: November 30, 2022

ELEVATION CERTIFICATE

Important: Follow the instructions on pages 1-9.

Copy all pages of this Elevation Certificate and all attachments for (1) community official, (2) insurance agent/company, and (3) building owner.

SECTION A - PROPERTY INFORMATION					ANCE COMPANY USE	
A1. Building Owner's Name				Policy Numb	per:	
CK CARR BROTHERS 2, LLC						
A2. Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Company NAIC Number:					AIC Number:	
120 MARBLEHEAD DRIVE						
City LITTLE RIVER		State South Ca	arolina	ZIP Code 29566		
A3. Property Description (Lot a	and Block Numbers Tay Bore			29300		
UNIT 20 CAPE COD COTTAGE		ei Number, Leg	gai Description, etc.)			
A4. Building Use (e.g., Resider	ntial, Non-Residential, Additio	n, Accessory, e	etc.) RESIDENTIA			
A5. Latitude/Longitude: Lat. 3	3D51'10.555" Long.	78D39'23.701"	Horizontal Da	tum: NAD 1	927 × NAD 1983	
A6. Attach at least 2 photograp	hs of the building if the Certif	ficate is being u	sed to obtain flood in	surance.		
A7. Building Diagram Number	6					
A8. For a building with a crawls	space or enclosure(s):					
a) Square footage of craw	Ispace or enclosure(s)		868.00 sq ft			
b) Number of permanent flo	ood openings in the crawlspa	ce or enclosure	e(s) within 1.0 foot abo	ove adjacent gra	ide 4	
c) Total net area of flood o	penings in A8.b	1000.00 sq in				
d) Engineered flood opening	ngs? 🛛 Yes 🗌 No					
A9. For a building with an attack	ned garage:					
a) Square footage of attack	hed garage	N/A sq ft				
b) Number of permanent flo	ood openings in the attached	garage within	1.0 foot above adjace	nt grade N/A		
c) Total net area of flood o	penings in A9.b	N/A sq	in			
d) Engineered flood openir	ngs? Yes X No					
SI	ECTION B - FLOOD INSUR	RANCE RATE	MAP (FIRM) INFOR	MATION		
	B1. NFIP Community Name & Community Number B2. County Name B3. State					
HORRY COUNTY 450104		HORRY CO	DUNTY		South Carolina	
B4. Map/Panel B5. Suffix Number	Date E	IRM Panel	B8. Flood Zone(s)	9. Base Flood E (Zone AO, use	levation(s) e Base Flood Depth)	
45051C0606 K		Revised Date 6-2021	AE 10)		
B10. Indicate the source of the Base Flood Elevation (BFE) data or base flood depth entered in Item B9:						
☐ FIS Profile ☒ FIRM ☐ Community Determined ☐ Other/Source:						
B11. Indicate elevation datum used for BFE in Item B9: NGVD 1929 X NAVD 1988 Other/Source:						
B12. Is the building located in a Coastal Barrier Resources System (CBRS) area or Otherwise Protected Area (OPA)? ☐ Yes ☒ No						
Designation Date: N/A	☐ CBRS	_		,		

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE	
Building Street Address (including Apt., Unit, Suite, and/or Bit 120 MARBLEHEAD DRIVE	ldg. No.) or P.O. Route	e and Box No.	Policy Number	r:
City State LITTLE RIVER South	ZIP C Carolina 2956		Company NAI	C Number
SECTION C - BUILDING ELEV	ATION INFORMATI	ON (SURVEY RE	QUIRED)	
C1. Building elevations are based on: *A new Elevation Certificate will be required when construction *A new Elevation Certificate will be required when constructions. C2. Elevations – Zones A1–A30, AE, AH, A (with BFE), VE Complete Items C2.a–h below according to the building Benchmark Utilized: SC VRS Indicate elevation datum used for the elevations in item NGVD 1929 NAVD 1988 Other/Son Datum used for building elevations must be the same at a large and the construction of the next higher floor c) Bottom of the lowest horizontal structural member (d) Attached garage (top of slab)	Drawings*	ing Under Construing is complete. E), AR, AR/A, AR/A, Item A7. In Puerto	ction* X Fir	measurement used. et meters et meters et meters
e) Lowest elevation of machinery or equipment servic (Describe type of equipment and location in Comm f) Lowest adjacent (finished) grade next to building (I g) Highest adjacent (finished) grade next to building (I h) Lowest adjacent grade at lowest elevation of deck structural support	ents) _AG) HAG)		13.5	et meters et meters
SECTION D - SURVEYOR, E	NGINEER, OR ARC	HITECT CERTIFI	CATION	
This certification is to be signed and sealed by a land surve I certify that the information on this Certificate represents n statement may be punishable by fine or imprisonment under Were latitude and longitude in Section A provided by a lice	eyor, engineer, or arch ny best efforts to interp er 18 U.S. Code, Sect	itect authorized by pret the data availa ion 1001.	law to certify e	elevation information. nd that any false here if attachments.
JACQUES J. BONNETT Title PLS Company Name SITE SURVEYING, LLC Address 111 WHITE OAK FOREST PL	C2(e), if applicable) TS ARE ENGINEERE NCHES. THE COUN	D FOR 250 SQ FT TY MAKES ME PL	Ext. PER VENT SE JT SQUARE IN	EE ATTACHED

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding	g information from Section	on A.	FOR INSURANCE COMPANY USE			
Building Street Address (including Apt., Unit, Suite, and/o 120 MARBLEHEAD DRIVE	r Bldg. No.) or P.O. Route	and Box No.	Policy Number:			
City Sta LITTLE RIVER So	ate ZIP Co outh Carolina 29566		Company NAIC Number			
SECTION E – BUILDING ELEVATION INFORMATION (SURVEY NOT REQUIRED) FOR ZONE AO AND ZONE A (WITHOUT BFE)						
For Zones AO and A (without BFE), complete Items E1–E5. If the Certificate is intended to support a LOMA or LOMR-F request, complete Sections A, B,and C. For Items E1–E4, use natural grade, if available. Check the measurement used. In Puerto Rico only, enter meters.						
	E1. Provide elevation information for the following and check the appropriate boxes to show whether the elevation is above or below the highest adjacent grade (HAG) and the lowest adjacent grade (LAG).					
crawlspace, or enclosure) is b) Top of bottom floor (including basement,	[feet meter	s above or below the HAG.			
crawlspace, or enclosure) is	[feet meter				
E2. For Building Diagrams 6–9 with permanent flood oper the next higher floor (elevation C2.b in the diagrams) of the building is	enings provided in Section	A Items 8 and/or feet meter				
E3. Attached garage (top of slab) is	[feet meter	s above or below the HAG.			
E4. Top of platform of machinery and/or equipment servicing the building is	[☐ feet ☐ meter	s 🔲 above or 🔲 below the HAG.			
E5. Zone AO only: If no flood depth number is available, floodplain management ordinance? Yes I			cordance with the community's certify this information in Section G.			
SECTION F - PROPERTY OWNE	ER (OR OWNER'S REPRE	ESENTATIVE) CE	RTIFICATION			
The property owner or owner's authorized representative community-issued BFE) or Zone AO must sign here. The	who completes Sections A	A, B, and E for Zo B, and E are cor	ne A (without a FEMA-issued or rect to the best of my knowledge.			
Property Owner or Owner's Authorized Representative's	Name		-			
Address	City	Sta	ate ZIP Code			
Signature	Date	Те	lephone			
Comments						
*						
			Ψ.			
			Check here if attachments.			

ELEVATION CERTIFICATE

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corres	FOR INSURANCE COMPANY USE					
Building Street Address (including Apt., Unit, Sui 120 MARBLEHEAD DRIVE	te, and/or Bldg. No.) or P.O. Ro	ute and Box No.	Policy Number:			
City LITTLE RIVER		Code 566	Company NAIC Number			
SECTION	N G - COMMUNITY INFORMA	TION (OPTIONAL)				
Sections A, B, C (or E), and G of this Elevation (The local official who is authorized by law or ordinance to administer the community's floodplain management ordinance can complete Sections A, B, C (or E), and G of this Elevation Certificate. Complete the applicable item(s) and sign below. Check the measurement used in Items G8–G10. In Puerto Rico only, enter meters.					
G1. The information in Section C was take engineer, or architect who is authorize data in the Comments area below.)						
G2. A community official completed Section or Zone AO.	n E for a building located in Zor	ne A (without a FEMA	A-issued or community-issued BFE)			
G3. The following information (Items G4–0	610) is provided for community	floodplain manageme	ent purposes.			
G4. Permit Number	G5. Date Permit Issued		Date Certificate of Compliance/Occupancy Issued			
G7. This permit has been issued for:	New Construction Substan	tial Improvement				
G8. Elevation of as-built lowest floor (including of the building:	basement)	feet	meters Datum			
G9. BFE or (in Zone AO) depth of flooding at the	ne building site:	feet	meters Datum			
G10. Community's design flood elevation:		feet	meters Datum			
Local Official's Name	Title					
Community Name	Telepho	one				
Signature	Date					
Comments (including type of equipment and local	ation, per C2(e), if applicable)					
			Check here if attachments.			

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

See Instructions for Item A6.

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the	FOR INSURANCE COMPANY USE		
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 120 MARBLEHEAD DRIVE			Policy Number:
City	State	ZIP Code	Company NAIC Number
LITTLE RIVER	South Carolina	29566	

If using the Elevation Certificate to obtain NFIP flood insurance, affix at least 2 building photographs below according to the instructions for Item A6. Identify all photographs with date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8. If submitting more photographs than will fit on this page, use the Continuation Page.



Photo One

Photo One Caption FRONT

Clear Photo One



Photo Two

Photo Two Caption BACK

Clear Photo Two

BUILDING PHOTOGRAPHS

ELEVATION CERTIFICATE

Continuation Page

OMB No. 1660-0008 Expiration Date: November 30, 2022

IMPORTANT: In these spaces, copy the corresponding information from Section A.			FOR INSURANCE COMPANY USE
Building Street Address (including Apt., Unit, Suite, and/or Bldg. No.) or P.O. Route and Box No. 120 MARBLEHEAD DRIVE			Policy Number:
City	State	ZIP Code	Company NAIC Number
LITTLE RIVER	South Carolina	29566	

If submitting more photographs than will fit on the preceding page, affix the additional photographs below. Identify all photographs with: date taken; "Front View" and "Rear View"; and, if required, "Right Side View" and "Left Side View." When applicable, photographs must show the foundation with representative examples of the flood openings or vents, as indicated in Section A8.



Photo Three

Photo Three Caption FLOOD VENTS

Clear Photo Three

Photo Four


Photo Four Caption

Clear Photo Four









Specialty code recognition

3.2 Engineered Opening:



Reissued March 2022

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

ICC-ES Evaluation Report

ESR-4332

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 EVALUATION SCOPE

Compliance with the following codes:

- 2021, 2018, 2015, 2012, 2009 and 2006 International Building Code® (IBC)
- 2021, 2018, 2015, 2012, 2009 and 2006 International Residential Code® (IRC)

Properties evaluated:

- Physical operation
- Water flow
- Weathering

2.0 USES

The model FFV-1608 Freedom Flood Vent™ is used to equalize hydrostatic pressure on walls of enclosures subject to rising or falling floodwaters. With the cover removed, the model FFV-1608 also provides natural air ventilation.

3.0 DESCRIPTION

3.1 General:

The model FFV-1608 Freedom Flood Vent[™] is an engineered mechanically operated in-wall flood vent (FV) that automatically allows floodwater to enter an enclosed area and exit. The FV is comprised of a polycarbonate frame with mounting flange and a polycarbonate horizontally pivoting door. When subjected to rising water, the model FFV-1608 Freedom Flood Vent[™] door is activated and pivots to allow water and debris to flow in either direction to equalize hydrostatic pressure from one side of the enclosure to the other. The FV features a removable polycarbonate cover. The FV door will activate and pivot when subjected to rising water with or without the polycarbonate cover installed.

This report is subject to renewal March 2024.

The FV complies with the design principle noted in Section 2.7.2.2 and Section 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)] for a maximum rate of rise and fall of 5.0 feet per hour (0.423 mm/s). In order to comply with the engineered opening requirement of ASCE/ SEI 24, Freedom Flood Vent™ FVs must be installed in accordance with Section 4.0 below. See Table 1 for vent size and maximum allowable area coverage for a single vent.

4.0 DESIGN AND INSTALLATION

The model FFV-1608 Freedom Flood Vent™ is designed to be installed into walls or overhead doors of existing or new construction. Installation of the vent must be in accordance with the manufacturer's instructions, the applicable code, and this report. In order to comply with the engineered opening design principle noted in Sections 2.7.2.2 and 2.7.3 of ASCE/ SEI 24-14 (2021, 2018 and 2015 IBC and IRC) [Section 2.6.2.2 of ASCE/ SEI 24-05 (2012, 2009, 2006 IBC and IRC)], the Freedom Flood Vent™ must be installed as follows:

- With a minimum of two openings on different sides of each enclosed area.
- With a minimum of one FV for every 250 square feet (23.2 m²) of enclosed area.
- Below the base flood elevation.
- With the bottom of the vent located a maximum of 12 inches (305.4 mm) above the higher of the final interior grade or floor and the finished exterior grade immediately under each opening.

5.0 CONDITIONS OF USE

The Freedom Flood Vent™ described in this report complies with, or is a suitable alternative to what is specified in, those codes listed in Section 1.0 of this report, subject to the following conditions:

- 5.1 The model FFV-1608 Freedom Flood Vent™ unit must be installed in accordance with this report, the applicable code and the manufacturer's published installation instructions. In the event of a conflict, the instructions in this report shall govern.
- 5.2 The model FFV-1608 Freedom Flood Vent™ unit must not be used in place of "breakaway walls" in coastal



high hazard areas, but are permitted for use in conjunction with breakaway walls in other areas.

5.3 Use of the Freedom Flood Vent as under-floor space ventilation is outside the scope of this report.

6.0 EVIDENCE SUBMITTED

Data in accordance with the ICC-ES Acceptance Criteria for Mechanically Operated Flood Vents (AC364), dated August 2015 (editorially revised February 2021).

7.0 IDENTIFICATION

7.1 The Freedom Flood Vent™ model described in this report must be identified by a label bearing the manufacturer's name (Smart Product Innovations, Inc.) and the evaluation report number (ESR-4332).

7.2 The report holder's contact information is the following:

SMART PRODUCT INNOVATIONS, INC. 430 ANDBRO DRIVE, UNIT 1 PITMAN, NEW JERSEY 08071 (800) 507-1527 www.freedomfloodvent.com info@freedomfloodvent.co

TABLE 1—FREEDOM FLOOD VENT™

MODEL NAME	MODEL NUMBER	MODEL SIZE	COVERAGE (sq. ft.)
Freedom Flood Vent™	FFV-1608	15 ³ / ₄ " X 8 ¹ / ₁₆ "	250

For SI: 1 inch = 25.4 mm

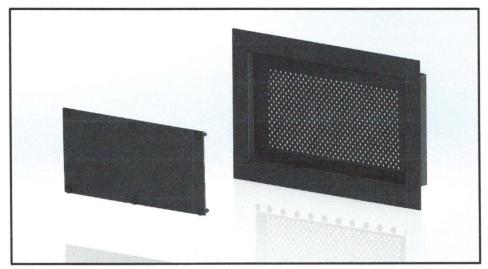


FIGURE 1—MODEL FFV-1608 FREEDOM FLOOD VENT™: SHOWN WITH COVER REMOVED



FIGURE 2—MODEL FFV-1608 FREEDOM FLOOD VENT™: SHOWN WITH FLOOD DOOR PIVOTED OPEN



ICC-ES Evaluation Report

ESR-4332 CBC and CRC Supplement

Reissued March 2022

This report is subject to renewal March 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43-Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that the Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with codes noted below.

Applicable code editions:

■ 2019 California Building Code (CBC)

For evaluation of applicable chapters adopted by the California Office of Statewide Planning and Development (OSHPD) and Division of State Architect (DSA), see Sections 2.1.1 and 2.1.2 below.

■ 2019 California Residential Code (CRC)

2.0 CONCLUSIONS

2.1 CBC:

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with CBC Chapter 12 provided the design and installation are in accordance with the 2018 *International Building Code®* (IBC) provisions noted in the evaluation report and the additional requirements of CBC Chapters 12 and 16, as applicable.

- 2.1.1 OSHPD: The applicable OSHPD Sections and Chapters of the CBC are beyond the scope of this supplement.
- 2.1.2 DSA: The applicable DSA Sections and Chapters of the CBC are beyond the scope of this supplement.

2.2 CRC:

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the 2019 CRC, provided the design and installation are in accordance with the 2018 International Residential Code® (IRC) provisions noted in the evaluation report.

This supplement expires concurrently with the evaluation report, reissued March 2022.





ICC-ES Evaluation Report

ESR-4332 FBC Supplement

Reissued March 2022

This report is subject to renewal March 2024.

www.icc-es.org | (800) 423-6587 | (562) 699-0543

A Subsidiary of the International Code Council®

DIVISION: 08 00 00—OPENINGS

Section: 08 95 43—Vents / Foundation Flood Vents

REPORT HOLDER:

SMART PRODUCT INNOVATIONS, INC.

EVALUATION SUBJECT:

FREEDOM FLOOD VENT™ AUTOMATIC FOUNDATION FLOOD VENT: MODEL FFV-1608

1.0 REPORT PURPOSE AND SCOPE

Purpose:

The purpose of this evaluation report supplement is to indicate that Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in ICC-ES evaluation report ESR-4332, has also been evaluated for compliance with the codes noted below.

Applicable code editions:

- 2020 Florida Building Code—Building
- 2020 Florida Building Code—Residential

2.0 CONCLUSIONS

The Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608, described in Sections 2.0 through 7.0 of the evaluation report ESR-4332, complies with the *Florida Building Code—Building and the Florida Building Code—Residential*, provided the design requirements are determined in accordance with the *Florida Building Code—Building and the Florida Building Code—Residential*, as applicable. The installation requirements noted in ICC-ES evaluation report ESR-4332 for the 2018 *International Building Code®* (IBC) meet the requirements of *Florida Building Code—Building* and the *Florida Building Code—Residential*, as applicable.

Use of the Freedom Flood Vent™ Automatic Foundation Flood Vent: Model FFV-1608 has also been found to be in compliance with the High-Velocity Hurricane Zone provisions of the *Florida Building Code—Building* and the *Florida Building Code—Residential*.

For products falling under Florida Rule 61G20-3, verification that the report holder's quality assurance program is audited by a quality assurance entity approved by the Florida Building Commission for the type of inspections being conducted is the responsibility of an approved validation entity (or the code official, when the report holder does not possess an approval by the Commission).

This supplement expires concurrently with the evaluation report, reissued March 2022.

